


Tunnel Heading and Loading Machine.

Model ITC312SL H1 #0529

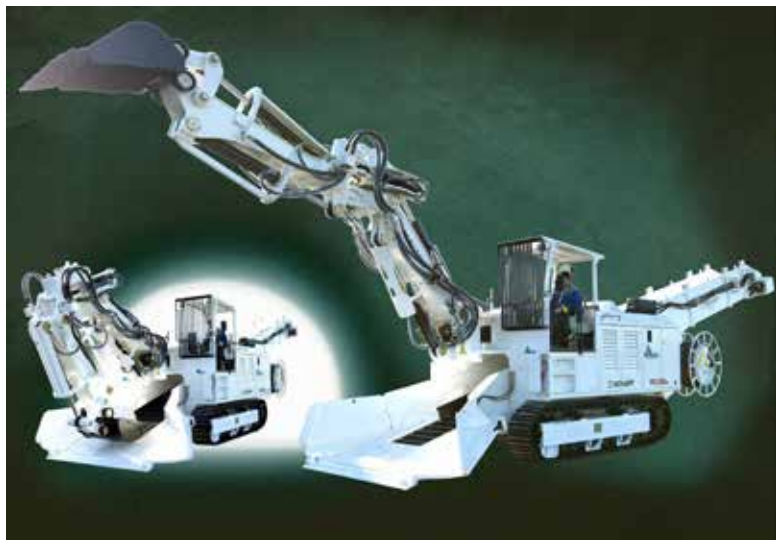

Informations

- Excavation boom with swivel dipper stick for heading in soft ground.
- Construction year 2015
- Electric drive 2'523 h
- Diesel drive 3'566 h
- Hammer 323 h

Technical data ITC 312 SL

Drive units

Electro-hydraulic and Diesel hydraulic power packs each with a separate pump unit with variable flow rate
Electric drive for emission-free work at the face
Air-cooled electric motor, power at 400 Volt , 50 Hz 110 kW
Diesel drive for travelling and operation without electric supply.
Water-cooled diesel engine. Deutz TCD2013 L06 2V
Power rating at 2,000 r.p.m 165 kW
Diesel engine complies with emission standard Euro St. 3a

Electrical system

Total installed power 115 kW
Voltage (standard) 400 V - 50 Hz AC
Control voltage 230 V - 24 V DC
Electrical system acc. to EN 60529 (IP54)
Cable reel hydraulically driven for 85 m cable 3x120+3x25 mm²

Operator's cab

FOPS Operator's cab gives all-round visibility
Roof foldable for transport.
CE conformity incl. video monitoring system for the right and rear side with colour LCD in the cab.

Hydraulic system

One axial piston double pump in swash plate design with constant power control for travelling and main working functions. One gear pump for pilot pressure supply.
Hydr. pilot control for travelling and main working functions
Boom control with 2 joysticks in Euro standards
Thermostatic controlled hydr. driven oil/air cooler
Max. hydraulic operating pressure 250-350 bar
Hydraulic oil capacity (incl. tank) 500 l
Hydraulic oil tank 400 l

Operating data

Minimal cross section approx. 17 m²
Machine width 2'750 mm
Maximal height 3'650 mm
Transport height 3'350 mm
Length (dep. on conveyor) ~13'000 mm
Width of loading apron (adjust.) 2'700-4'100 mm
Width of conveyor (internal) 1000 mm
Height of conveyor (internal) 800 mm
Conveyor capacity approx. 600 m³/h
Conveyor discharge height 2'500-3'500 mm
Operating weight approx. 40 t

Boom Equipment H1

H1 Boom equipment for excavation and loading of soft ground or blasted material, includes:

- King post with jib, tilt-swivel console and dipper stick
- Excavation and mucking bucket, width 350 -900 mm
- Hydraulic circuit for a hydraulic rock breaker
- Loading capacity acc. to rock conditions approx. 3 m³/min

Other Equipment

It is possible to attach a range of anxillary equipment, such as different bucket sizes, ripper tooth, pony truck, rubber plated conveyor, transverse cutting unit, soot particle filter, closed cab, central lubrication device, etc.

Actual configuration

