


## **TUNNEL LOADING MACHINE**

# ITC 125 - F4

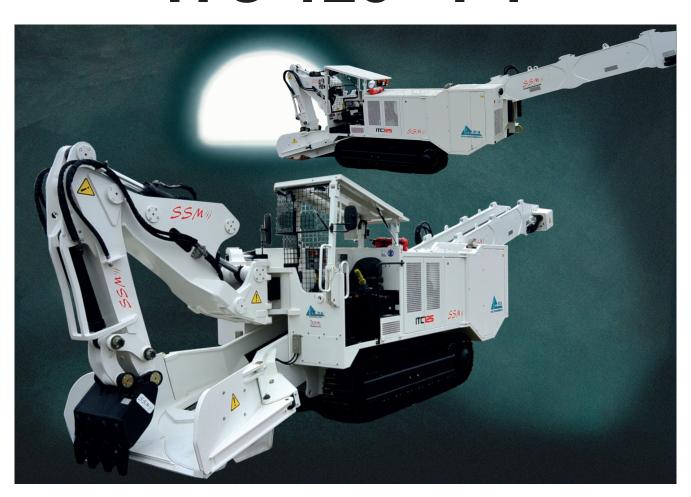

 For heading in soft ground and high speed mucking of blasted rock

Minimal cross section

approx. 9 m<sup>2</sup>

Diesel drive

80 kW

• Electric drive

75 kW

Operating weight

approx. 22 t



#### Technical data ITC 120N - F4

#### Drive units

Electro-hydraulic and Diesel-hydraulic power packs each with a separate pump units

Electric drive for emission-free work at the face

Air-cooled electric motor, Power at 400 Volt , 50 Hz 75 kW Diesel drive for travelling and operation without electrical supply

Water-cooled diesel engine, Deutz TCD3.6 L04

Power rating at 2,300 r.p.m 80 kW Diesel engine complies with emission standard EU V, US T4f, EU IV

Electrical system

Total installed power 60 kW
Voltage (standard) 400 V - 50 Hz AC
Control voltage 24 V DC
Electrical system acc. to EN 60529 (IP54)
Cable reel hydraulically driven with 75 m
Cable cross section at 400 V - 50 Hz 3x50+3x10 mm²

#### Operator's cab

FOPS-Operator's cab gives all-round visibility, and front protection grill.

Roof foldable for transport

CE conformity incl. video monitoring system for the right and rear side with colour LCD in the cab.

#### Hydraulic system

Load Sense hydraulic system with combination of axial piston gear pump at each drive

Pilot control sysem for all working functions

Main operation by 2 joysticks in Euro standards

Thermostatic controlled hydr. driven oil cooler

Max. hydraulic operating pressure 280-380 bar Hydraulic oil capacity (incl. tank) 400 I Hydraulic oil tank 300 I

#### Operating data (F4 boom equipment)

Mininimal cross section	approx. 9 m <sup>2</sup>
Machine width	1'950 mm
Maximal height	2'400-2'750 mm
Transport height	2'400 mm
Length (dep. on equipment)	~10'000 mm
Width of loading apron (adjust.)	1'850-2'950 mm
Width of conveyor (internal)	620 mm
Height of conveyor (internal)	650 mm
Conveyor capacity	approx. 150 m <sup>3</sup> /h
Conveyor discharge height	1'800-2'850 mm
Operating weight	approx. 22 t

#### Boom Equipment F4

F4 Boom equipment forscaling and loading, includes:

- King post with jib and dipper stick
- Excavation and mucking bucket, width 350 700 mm
- Hydraulic circuit for a hydraulic rock breaker
- Loading capacity acc. to rock conditions approx. 2,5 m³/min
  Breakaway torque 80 kN
  Tear-out force over dipper stick 80 kN

#### Other Equipment

It is possible to attach a range of ancillary equipment, such as different bucket sizes, ripper tooth, pony truck, rubber plated conveyor, other voltage and frequency, other boom, quick hitch device, transverse cutting unit, soot particle filter, central lubrication device, extinguisher system, etc.

Further details of attachments and accessories available upon request.

Subject to modification without prior notice.



### **Tunnel Loading machine** 7350 2350 Model ITC 125 F4 3150 3 views with boom geometry 4700 2400 5800 2750 400 2000 2000 4700 3300 3300 3950 2850 2550 2450 1850 - 2950 2500 450 1100 9000 1950 1000 2200 2000 1200 7350 R4450 Force acc. to ISO 6015, with standard bucket Breakaway torque 80 kN Tear-out force over dipper stick 80 kN Specific ground pressure 10 N/cm<sup>2</sup> 3m

Global weight

21,3 t

S783

| 03.08.20 |
| I:\Acad\dessir |
| Dessin non control |
| Rev.N°: Date:

03.08.2018 PB
I:\Acad\dessin\_S\S783\
Dessin non contractuel



CH-1920 MARTIGNY Tf: +41 277 222 191 Fax: +41 277 222 185 info@itcsa.com

