

Ballast-Loading machine

TEREX|SCHAEFF **ITC 312 VL2**

INFO
-2006-



Rail underground renewal in the station area of Geneva in Switzerland

Quick loading in limited space



The ballast loading machine Schaeff model ITC 312 VL2 with jointed boom in loading position




INTER TECHNO COMMERCE SA

122, Rue de la Fusion Fax: +41-277 222 185
CH - 1920 - MARTIGNY Tf: +41-277 222 191
<http://www.itcsa.com> e-mail: info@itcsa.com



MAIN DATA

Base Machine: Schaeff type	ITC	312
Maximum chassis width:	mm	2500
Apron throat width	mm	770
Diesel Engine	Deutz	Typ
BF6M1013		
Power output	kW	142
Driving speed:	km/h	0-3,6
Conveyor chain speed:	m/s	0.5 - 1.1
Loading capacity, up to	m ³ /min	5
Specific ground pressure:	kp/cm ²	1.0
Traction power:	kN	280
Weight	t	30

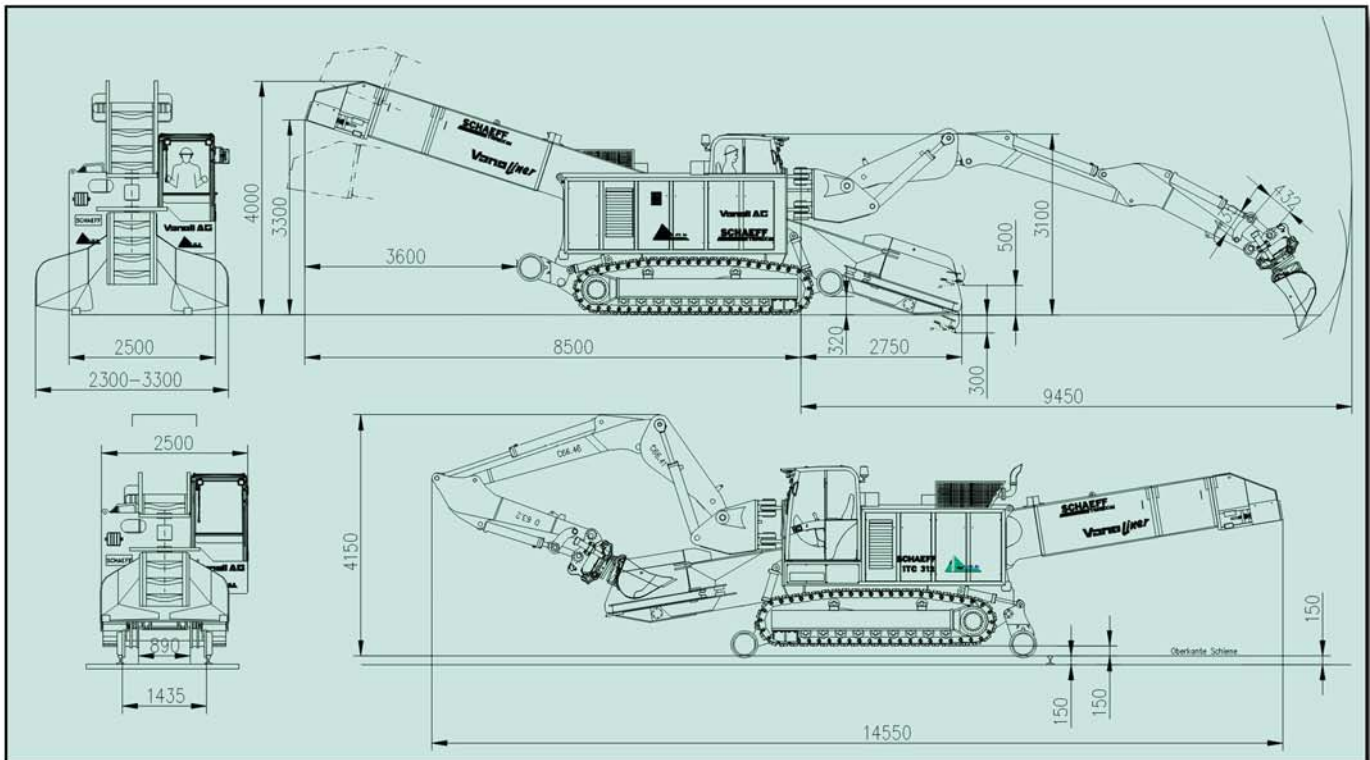

Acurate working thanks to the Roto-Tilt device



Reduced space requirement thanks to onboard conveyor



ITC 312 VL2

TEREX|SCHAEFF

Ballast-Loading machine